

# LifePod®

## User Manual + Programming Guide

For setup, tutorials, and FAQs visit [www.vaulteksafe.com/support/](http://www.vaulteksafe.com/support/) and select your model.

## Important Usage Notes

### Locking

Step 1 Shut the lid and the close compression latch.

Step 2 Press and hold lock icon for 3 seconds.

### Unlocking

Step 1 Tap the lock pad to wake the unit.

Step 2 Unlock with master code.

Step 3 Undo the compression latch.

**Do not forget your master code.** Once you engage the built-in lock system you will be unable to unlock LifePod® X without the master code.

**If the lid does not open when unlocked,** A) Close the side compression latch and unlock the unit again to free the lock mechanism. B) Due to LifePod's airtight seal and pressure changes when shipping the lid can stick and be difficult to open. Release the pressure by opening the side micro-USB cover (Figure 10 on page 01) and the lid can freely open.

## Table of Contents

### Quick Start Guide

- Step 1** Product Registration (07)
- Step 2** Battery Installation (08)
- Step 3** Master Code Programming (09 / 10)

### Box Contents

Vaultek® LifePod® X  
Steel Security Cable  
Owner's Manual

01 / 02	Get to Know Your LifePod® X	09 / 10	Master Code Programming
03	LED Indicators	11	Control Sound
04	Using the Steel Security Cable	11	Using the Micro-USB Port
05 / 06	Basic Operation	12	Customer Support
07	Product Registration	12	Troubleshooting
08	Battery Installation	13	Warranty

For setup, tutorials, and FAQs visit [www.vaulteksafe.com/support/](http://www.vaulteksafe.com/support/) and select your model.

## Warnings

**Do not forget your master code.** Once you engage the built-in lock system you will be unable to unlock LifePod® X without the master code.

**IMPORTANT!** LifePod® X will float when loaded with weight up to 1.2lb.

**IMPORTANT!** LifePod® X can be submerged to 1 foot for up to 30 minutes.

**DO NOT** expose to extreme heat or cold. Battery power may be affected. Acceptable operation range is -14°f to 120°f.

### To ensure proper weather sealing:

**ALWAYS** check that the rubber gasket is free of debris before closing the lid.

**ALWAYS** check that the side compression latch is fully engaged and closed.

**ALWAYS** check that the side rubber cover is closed tightly.


**Disclaimers:** Neither seller nor manufacturer shall be liable for any injury, loss or damage, direct or consequential, arising out of the use of, or the inability to use, the Vaultek® LifePod® X. The user shall determine the suitability of the Vaultek® LifePod® X before the intended use and user assumes all risk and liability whatsoever in connection therewith.

## Get to Know Your Vaultek® LifePod® X


The Vaultek® LifePod® X is a pin access portable lockbox. It can be secured using the side compression latch to protect the interior from environmental factors such as water, with the added option of securely locking the unit with the keypad. It's high impact polymer and portable design makes it ideal to transport and protect valuables and personal items. Powered by a AA battery (not included), LifePod® combines security with convenient access.

- |                                   |   |
|-----------------------------------|---|
| <b>01.</b> Capacitive Keypad      | <b>06.</b> Steel Security Cable Mount                 |
| <b>02.</b> Side Compression Latch | <b>07.</b> Battery Cover                              |
| <b>03.</b> Anti-Impact Latch      | <b>08.</b> Program Button                             |
| <b>04.</b> Apple AirTag Pocket    | <b>09.</b> Removable Tray                             |
| <b>05.</b> Lid Organizer          | <b>10.</b> Micro-USB Cover and Pressure Release Valve |

- Specs!** LifePod® X will float when loaded with weight up to 1.2lb.  
**Specs!** LifePod® X can be submerged to 1 foot for up to 30 minutes.  
**Specs!** LifePod® X has an acceptable operation range is -14°F to 120°F.

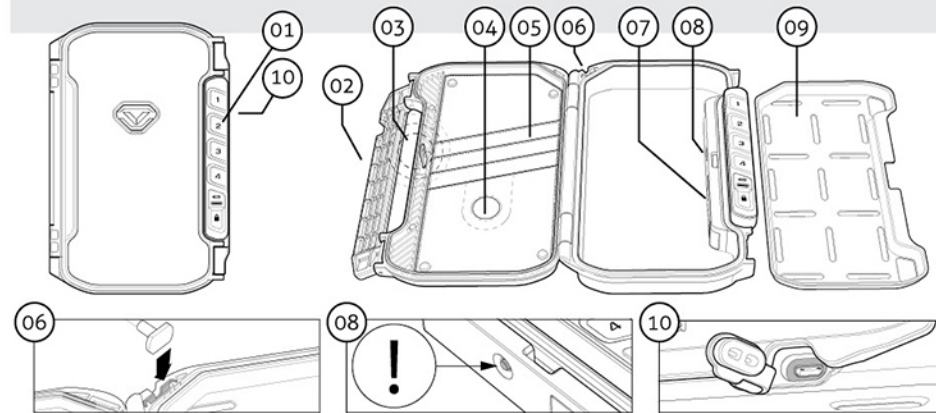

## LED Indicators

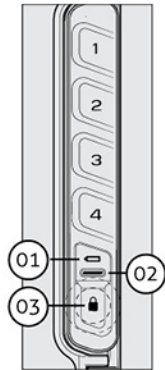

03 Vaultek®

LifePod® X's capacitive keypad has multiple LEDs built in to provide various feedback. The LEDs will illuminate as needed when the unit is awake. **To wake the unit, tap the Lock Pad.**

**01. Battery Indicator:** When the unit is awake, the battery indicator will light either GREEN or RED. GREEN indicates the battery has sufficient power, and RED indicates the battery is in need of replacement. When the light is flashing RED and you hear several rapid beeps that indicates that the battery is very low. This continues every 5 minutes until the battery is replaced.

**02. Status LED:** The status LED will provide feedback on various commands. It will light GREEN when correct codes are entered and RED when an incorrect code is entered, providing indication that keypad tampering has occurred.

**03. Lock Pad:** The lock pad illuminates RED only when the unit has been locked using the keypad, and requires the use of the master code to unlock it. When locked, and the unit is awake, the lock icon will be solid RED.


## Using the Steel Security Cable

Included is a steel security cable to secure the LifePod® X to a fixed object.


**Step 1** First wrap the looped end of the security cable around an object of your choice.

**Step 2** Pull the adapter piece through the loop, and cinch tight.


**Step 3** Place the adapter piece in its slot in the LifePod® X, and close the lid.



1



2



3

04 Vaultek®

## Basic Operation: Locking

With a AA battery installed, you can now lock your LifePod® X. Unique to LifePod® X is a built-in lock system to engage for added security.

**Step 1** Shut the lid and the close compression latch.

**Step 2** Press and hold lock pad icon for 3 seconds.

**Do not forget your master code.** Once you engage the built-in lock system you will be unable to unlock LifePod® X without the master code.

**IMPORTANT!** Before locking your LifePod®, always be sure the side compression latch is closed first. This will ensure the locking mechanism engages properly.

**Security Sleep Mode:** Activates when (6) consecutive incorrect keypad entries are entered. LifePod® will not accept any entries for four minutes. If a key is pressed during this time, the status LED will flash RED and the alarm beeps.

## Basic Operation: Unlocking

With a AA battery installed, you can now unlock your LifePod® X. Unique to LifePod® X is a capacitive numeric keypad with built-in proximity sensor.

**Step 1** Tap the lock pad icon to wake the unit.

**Step 2** Unlock with master code. (Default master code is 1-2-3-4)

**Step 3** Undo the compression latch.

**IMPORTANT!** Do not undo the side compression latch until the unit has been unlocked with the correct master code first. Undoing the compression latch first may cause binding on the lock mechanism and the unit will not unlock.

**If the lid does not open when unlocked,** A) Close the side compression latch and unlock the unit again to free the lock mechanism. B) Due to LifePod's airtight seal and pressure changes when shipping the lid can stick and be difficult to open. Release the pressure by opening the side micro-USB cover (Figure 10 on page 01) and the lid can freely open.

## Product Registration


Vaultek® strongly encourages you to register your LifePod® X as soon as you receive it.

**Registration provides many benefits including two year warranty, and technical support.** Your Vaultek® LifePod® X has a unique product number on the inside of the battery door. You will need those numbers to register your new unit.

**Step 1** Locate your product number. It is printed on the first page of this user manual and on the back of the battery door.

**Step 2** Please visit the Vaultek® website at [vaulteksafe.com](http://vaulteksafe.com) and click Support then click Registration from the available options.

**Step 3** Enter the required information in the form and click submit.

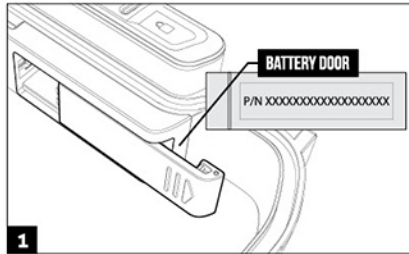

## Battery Installation

LifePod® X is powered by a AA battery (not included). With a AA battery installed, you can unlock and lock your LifePod® X.

### Battery Tips!

- We recommend using a brand name battery like Duracell or Energizer.
- Under normal use the battery can last up to one year.
- In the event the battery dies you can plug LifePod® X into a power source using a micro-USB cable and open the unit by master code. Reference Using the Micro-USB Port on page 11.

**Step 1** Undo the side compression latch to open your LifePod® X. Locate the battery door on the front wall and remove by sliding open (Figure 1 on page 07).

**Step 2** Be sure to snap the battery in the correct orientation. Plus side on the right. When the battery is snapped in you will hear a short welcome tone and the keypad will light up.

**Troubleshooting!** If you snap the battery in and the keypad is flashing then your battery is likely low. Replace the battery with a new AA battery. We recommend Duracell or Energizer.

## Master Code Programming

First time users should change the default code as soon as possible to prevent unauthorized access when using the lock.

### Code Requirement Tips!

- The default master code is 1-2-3-4.
- Your code can be a minimum of 4 digits, or as long as 8 digits.
- Two keys can not be pressed simultaneously.
- Programming a new code will overwrite your previous code.

**Do not forget your master code.** Once you engage the built-in lock system you will be unable to unlock LifePod® X without the master code.

**IMPORTANT!** The PROGRAM button will not function when locked. Be sure the LifePod® X latch is in the unlocked position.

**Troubleshooting!** If you make a mistake start over with step 1.

**Step 1** First open the unit and tap the Lock Pad to wake the unit up. When the keypad lights up, your LifePod® X is awake and ready for programming.



**Step 2** While LifePod® X is awake press and hold the PROGRAM button for 3 seconds until ALL keys (1-4) turn solid RED.

**Step 3** Enter your new code.

**Step 4** Immediately press and hold the PROGRAM button a second time for 3 seconds until ALL keys (1-4) turn solid RED.

**Step 5** Enter your new code a second time.

**Step 6** Immediately press and hold the PROGRAM button a third time for 3 seconds. The Status LED will flash GREEN and LifePod® will beep to confirm the code change is successful.






## Control Sound

By default, the sound is ON.


To toggle the sound ON/OFF you need to wake up LifePod® X by tapping the center Lock Pad then press and hold keys '2' and '3' together. The Status LED will flash RED indicating OFF or GREEN indicating ON.



## Using the Micro-USB Port

In the event the battery dies while traveling, you can power on the unit using the backup micro-USB port.

Simply open the side protective rubber cover and plug in a micro-USB cable (not included) into the port. While the cable is plugged into an external power source, LifePod® will function normally allowing you to enter the code.



## Customer Support

If you have a question or need help with your Vaultek® LifePod® X, we encourage you to visit [www.vaulteksafe.com/support/](http://www.vaulteksafe.com/support/) or email our support team at [support@vaulteksafe.com](mailto:support@vaulteksafe.com).

## Troubleshooting

**Lid is not opening:** Due to LifePod's airtight seal and pressure changes when shipping the lid can stick and be difficult to open. If the lid does not open, release the pressure by opening the side micro-USB cover and the lid can freely open.

**Keypad is Flashing RED:** The battery is likely bad. Test the normal function by removing the battery and plugging in a micro-USB cable to the micro-USB port. If the unit resumes normal function then the installed battery is bad. We recommend a Duracell or Energizer battery.

---

**FCC** This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. NOTE: The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications or changes to this equipment. Such modifications or changes could void the user's authority to operate the equipment.

## Limited Warranty (Terms and Conditions)

VAULTEK® IS COMMITTED TO PROVIDING PRODUCTS OF HIGH QUALITY AND VALUE AND MAKES EVERY EFFORT TO ENSURE ITS PRODUCTS ARE FREE OF DEFECTS.

Vaultek® guarantees your LifePod® X will be free of defects in materials or workmanship for a period of one year from the date of original purchase from an authorized dealer and two years with product registration.

The warranty is only valid for the original purchaser and not transferable. This warranty is only valid for products purchased and operated in the U.S. This warranty does not cover abuse, misuse, use in any manner for which is not designed, neglected, modification, damage inadvertently caused by the user, accidents and/or tampering.

If service is needed Vaultek® X will, at its option, exchange or repair without charge for parts or labor. Upon authorization of warranty service, customers are responsible for securely packaging product.

Additionally, customers are responsible for costs of shipping to and from Vaultek® X service center.

If the claimed defect cannot be identified or reproduced, customers will be held responsible for the costs incurred. Please have the following information available before you begin a claim with Vaultek® X:

- Purchaser's name, mailing address, email address, and a phone number.
- Copy of receipt or online order number (if purchased directly from us or Amazon)
- Authorized Dealer Name (if applicable)
- Detailed description of the problem

NEITHER SELLER NOR MANUFACTURER SHALL BE LIABLE FOR ANY INJURY, LOSS OR DAMAGE, DIRECT OR CONSEQUENTIAL, ARISING OUT OF THE USE OF, OR THE INABILITY TO USE THE VAULTEK® LIFEPOD® X.



**VAULTEK®**

37 North Orange Ave. Suite 770 Orlando, FL 32801

VAULTEKSAFE.COM

REV 080323 AM